

LAMIA LED TUBE LIGHT 1500mm T8 24W

Features

- Energy efficient replacement for conventional fluorescent T8 tube light.
- High efficiency LED light source, 300-degree beam angle for maximum illumination.
- Suitable for totally enclosed fixtures.
- Driver components from FIRST MOS (USA), MPS IC CHIP (USA), Rubycon Capacitor (JAPAN),
- Built in surge protection.
- High light transmittance diffused glass structure.
- One side AC input feed for easy rewiring from FL tube fixture to LED light fixture.
- RoHS compliant.
- Instant turn on. No flickering

Applications


- Office lighting, Corridors, Canopy lights, Garage lights, Cove lights, Parking area lighting.

Specifications


Model No.	S10201-T8-24
Type	T8 (FL tube retrofit)
Light Source	LG 2835 SMD LED
Power	24W
Power Factor	0.9
Luminous flux	3600LM
THD	<20%
CCT	4000K (840)
SDCM	<5
IP Rating	IP20
Material	Glass + PC end caps
Bulb finish	Milky white
Net weight	300 gm
Equivalent lamp power	24W LED tube = 58W FL tube

Input Voltage	165-265VAC
Frequency	50-60Hz
Driver	Inbuilt (one sided input)
Cap base	G13
Working Temperature	-25 to 45 Deg C
Beam Angle	300 Degree
Luminous efficacy	150 LM/W
Life	50,000 Hrs (L70)
CRI	>82
T Cas Max (Tc)	60 Deg C
Dimming	No
Dimension	1499mm X 25mm
Warranty	3 years
Certifications	CE, RoHS, LM79

Photometric data

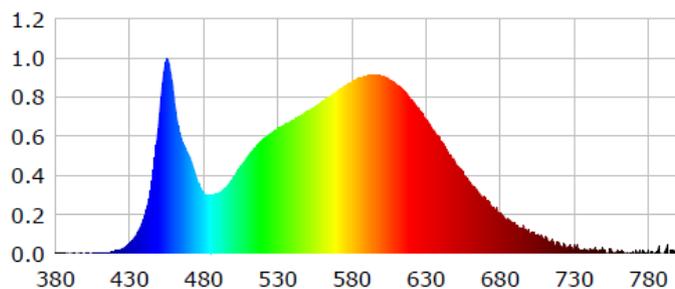

Dimension drawing

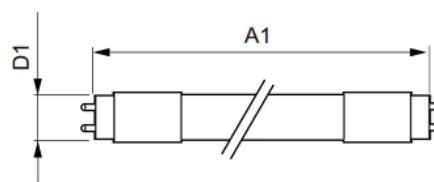

A1=1499mm, D1=25mm

