



## Retro LED PL lamp 6W GX24q

### Features

- Energy efficient replacement for conventional CFL lamps.
- High efficiency LED light source, 120-degree beam angle for maximum illumination.
- Unique aluminium heatsink passive cooling system, uses an increased cooling surface area to reduce the operating temperature of LED and Driver.
- Built in surge protection.
- High light transmittance PC diffusers.
- Flicker free & Instant ON.
- Mercury-free lamp.
- RoHS Compliant.

### Applications

- Wall lights, Down lights, Ceiling lights.


## Specifications

Model No.	S2709-6-4P
Type	PL (retrofit for CFL lamp)
Light Source	2835 SMD LED
Power	6W
Base	G24q-4Pin / GX24q-4pin
Power Factor	0.9
THD	<20%
Beam Angle	120°
CCT	3000K (830)
SDCM	<6
IP Rating	IP20
Material	Aluminium+PC diffusers
Lamp finish	Silver+white
Warranty	3 years




Input Voltage	100-265VAC
Frequency	50-60Hz
Driver	Inbuilt
Luminous flux	744LM
Luminous efficacy	124LM/W
Lifespan	30,000 Hrs (L70)
CRI	>83
Dimming	No
T Cas Max (Tc)	65°C
Working Temperature	-25° to 45°C <sup>1</sup>
Dimension	130*34*34mm
Certifications	CE, RoHS, LM80, LM79 <sup>2</sup>
Net weight	150gm
Equivalent lamp power	6W LED =13W/18W CFL

@ All the above information at a testing condition:- Ta=25°C

## Photometric data

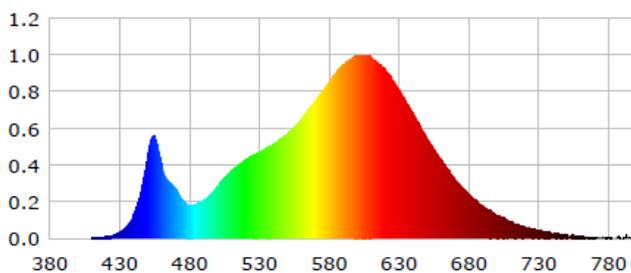

## Dimension drawing

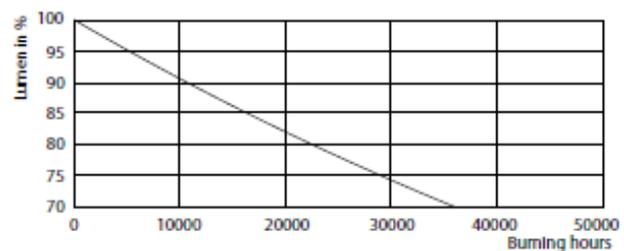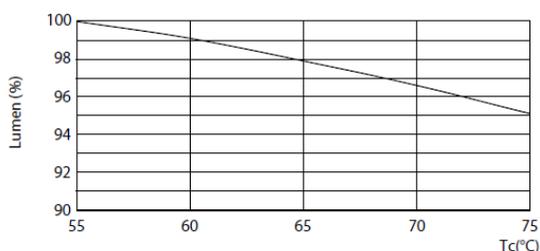

1 – Recommended to keep the ambient temperature in this limit while installing in closed fixtures  
2 – Will be provided up on request

© 2023 UNIFCO WLL. All rights reserved. UNIFCO have the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.