



Retro LED PLL lamp 24W 2G11 360D

Features

- Energy efficient replacement for conventional CFL lamps.
- High efficiency LED light source, 360-degree beam angle for maximum illumination.
- Unique aluminium heatsink passive cooling system, uses an increased cooling surface area to reduce the operating temperature of LED and Driver.
- Suitable for totally enclosed fixtures.
- Driver components from FIRST MOS (USA), MPS IC CHIP (USA), Rubycon Capacitor (JAPAN).
- Built in surge protection.
- High light transmittance PC diffusers.
- Flicker free & Instant ON.
- RoHS Compliant.

Applications




- Wall lights, Down lights, Ceiling lights.

Specifications


Model No.	S02910-24-360D
Type	PLL (retrofit for CFL 2G11 lamp)
Light Source	LG 2835 SMD LED
Power	24W
Base	2G11 – 4Pin
Power Factor	0.9
THD	<20%
Beam Angle	360 Degree
CCT	6500K (865)
SDCM	<6
IP Rating	IP20
Material	PC
Lamp finish	Milky white
Warranty	3 years

Input Voltage	85-277VAC
Frequency	50-60Hz
Driver	inbuilt
Luminous flux	3360LM
Luminous efficacy	140LM/W
Life	35,000 Hrs (L70)
CRI	>83
Dimming	No
T Cas Max (Tc)	65 Deg C
Working temperature	-25 to 45 Deg C
Dimension	535mm X 43mm X 23mm
Certifications	CE, RoHS, LM79
Net weight	270 gm
Equivalent lamp power	24W LED = 55W CFL

Photometric data

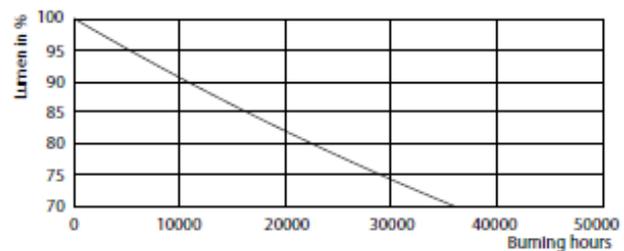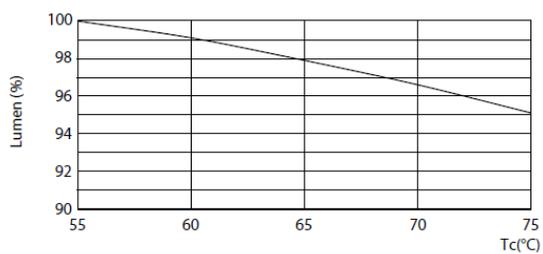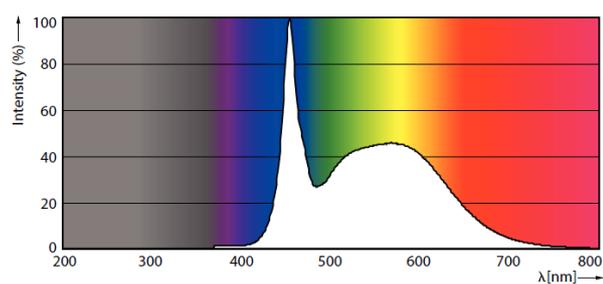

Dimension drawing

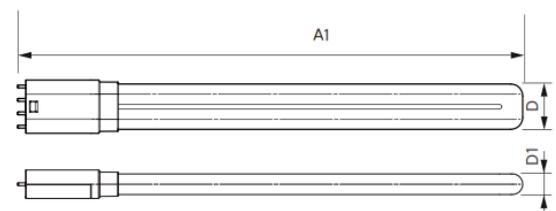

A1=535mm D=43mm D1= 23mm