

Retro LED PAR30 lamp 15W

Features

- Energy efficient replacement for conventional metal halide and halogen lamps.
- High efficiency LED light source, low beam angle for maximum illumination.
- Unique aluminium heatsink passive and active cooling system, uses an increased cooling surface area to reduce the operating temperature of LED and Driver.
- Suitable for totally enclosed fixtures.
- Driver components from FIRST MOS (USA), MPS IC CHIP (USA), Rubycon Capacitor (JAPAN).
- Built in surge protection.
- Flicker free & Instant ON.
- It works with most of the E27 luminaires as true retrofit solution.
- RoHS Compliant.

Applications

Lighting applications to replace the halogen or metal halide lamps in,


- Track lights, buried lights, downlights, flood lights, wall lights.

Specifications


Model No.	S02910-PAR30-15
Type	PAR lamp
Light Source	CREE COB LED
Power	15W
Power Factor	0.9
Luminous flux	1500LM
THD	<20%
CCT	3000K (830)
SDCM	<6
IP Rating	IP20
Material	Aluminium
Lamp finish	Gray
Net weight	0.450 Kg
Equivalent lamp power	15W LED = 70W HID lamp

Input Voltage	165-265VAC
Frequency	50-60Hz
Driver	Inbuilt
Base	E27
Working Temperature	-25 to 45 Deg C
Beam Angle	15 / 30 Degree
Luminous efficacy	100 LM/W
Life	35,000 Hrs (L70)
CRI	>83
T Cas Max (Tc)	70 Deg C
Dimming	No
Dimension	D95mm X H100mm
Warranty	3 years
Certifications	CE, RoHS, LM79

Photometric data

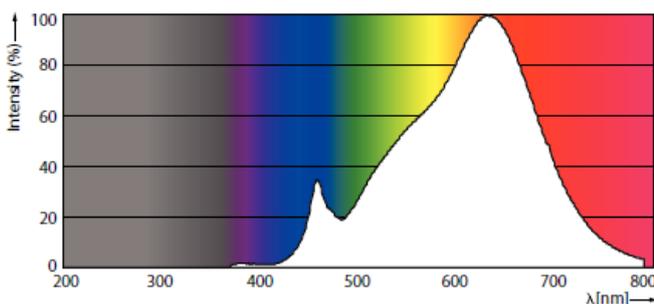

Dimension Drawing

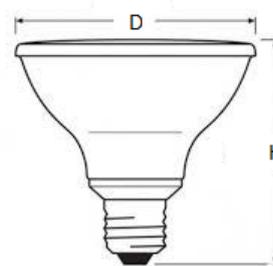

D = 95mm H = 100mm

