



LAMIA LED TUBE LIGHT T5 2FT 7W

Features

- Energy efficient replacement for conventional fluorescent T5 high efficiency tube light.
- High efficiency LED light source, 220 degree beam angle for maximum illumination.
- Suitable for enclosed fixtures.
- Remarkable 150LM/W efficacy.
- Driver components from FIRST MOS (USA), MPS IC CHIP (USA), Rubycon Capacitor (JAPAN),
- Built in surge protection.
- High light transmittance diffused glass structure.
- One side AC input feed for easy rewiring from FL tube fixture to LED light fixture.
- Mercury-free.
- Instant turn on. No flickering.

Applications

- Office lighting, Corridors, Canopy lights, Garage lights, Cove lights, Parking area lighting.


Specifications

Model No.	S10301-T5-7
Type	T5 (FL tube retrofit)
Light Source	2835 SMD LED
Power	7W
Power Factor	0.9
Luminous flux	1050LM
THD	<20%
CCT	4000K (840)
SDCM	<5
IP Rating	IP20
Material	Glass + PC end caps
Bulb finish	Milky white
Net weight	100gm
Equivalent lamp power	7W LED tube = 14W FL tube


Input Voltage	165-265VAC
Frequency	50-60Hz
Driver	Inbuilt (one sided input)
Cap base	G5
Working Temperature	-25 to 45°C ¹
Beam Angle	220°
Luminous efficacy	150 LM/W
Lifespan	50,000 Hrs (L70)
CRI	>83
T Cas Max (Tc)	60°C
Dimming	No
Dimension	L549mmxD16mm
Warranty	3 years
Certifications	CE, RoHS, LM80, LM79 ²

@ All the above information at a testing condition:- Ta=25°C



Photometric data

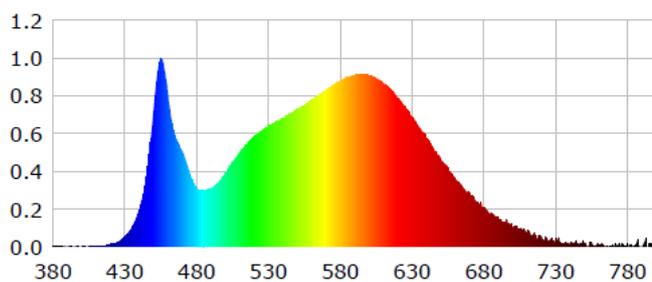

Dimension drawing

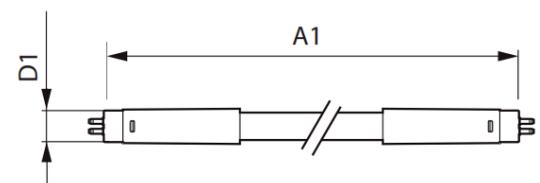

A1=549mm, D1=16mm

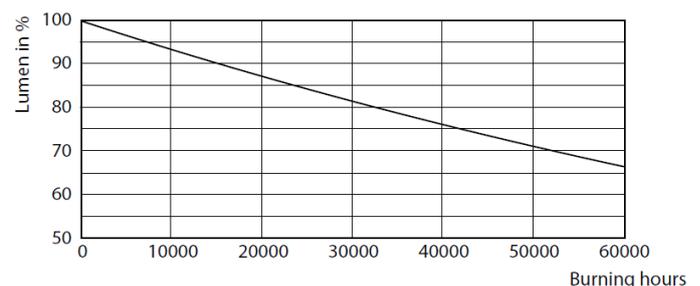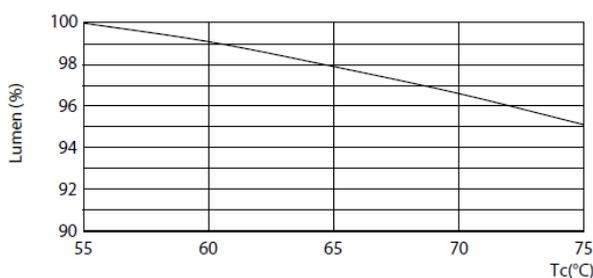

¹ - Recommended to keep the ambient temperature in this limit while installing in closed fixtures

² - Will be provided up on request

© 2023 UNIFCO WLL. All rights reserved. UNIFCO have the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.