



Tri-proof batten light 18W

Features

- Energy efficient replacement for conventional fluorescent light fixtures.
- High efficiency LED light source, 120-degree beam angle for maximum illumination.
- Unique aluminium heatsink passive cooling system, uses an increased cooling surface area to reduce the operating temperature of LEDs and Driver.
- Driver components from FIRST MOS (USA), MPS IC CHIP (USA), Rubycon Capacitor (JAPAN).
- Built in surge protection.
- High light transmittance PC diffusers.
- Flicker free & Instant ON.
- RoHS Compliant.
- Serial linkable design makes multiple fixture connections easy.


Applications

- Warehouses, Garages, Hotels, Offices, Museums, Residential applications.

Specifications

Model No.	S05320-18	Input Voltage	175-265VAC
Type	Light fixture	Frequency	50-60Hz
Light Source	LG 2835 SMD LED	Driver	inbuilt
Power	18W	Luminous flux	2880LM
Power Factor	0.9	Luminous efficacy	150LM/W
THD	<20%	Life	50000Hrs (L70)
Beam Angle	120 Degree	CRI	>83
CCT	4000K (840)	Dimming	No
SDCM	<6	T Cas Max (Tc)	70 Deg C
IP Rating	IP66	Working Temperature	-25 to 50 Deg C
Material	Aluminium + PC diffusers	Dimension	L600*W75*H65mm
Lamp finish	Milky white	Certifications	CE, RoHS, LM79
Warranty	3 years	Net weight	0.85 Kg
Mounting	Surface mount / Wall mount / Hanging	Equivalent lamp power	18W LED=1*36W T8 FL Tube

Dimensions

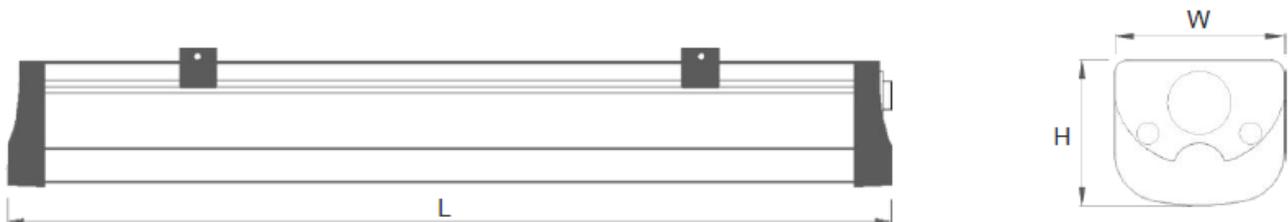

Photometric Data

