



DC Linea Flexi Strip light-S2835

All linear lighting applications, are fruitfully fulfilled by these LED Strip lights. Power saving capability of up to 65%, along with high reliability makes LINEA the finest solution for Indirect lighting applications. Other applications also include product display showcases, contour lighting and architectural lighting.

Benefits

- Instant start up
- No Flickering
- No Humming
- No emission of IR and UV rays
- Environment friendly, does not contain mercury (RoHS)

Features

- Powered by external electronic power supply
- High class LED providing uniform light output


Applications

- Cove lighting in homes, offices
- Fashion Stores
- Malls


Specifications

Model No.	S2835-60-12 / S2835-60-24	Input Voltage	12VDC / 24VDC
Type	Linear Light	Driver	External
Light Source	SMD LED	Beam Angle	120 Degree
Power	4.8W/M, 5W/M	Life Span	50,000 Hrs
Luminous flux	480LM/M, 500LM/M	CRI	>83
Operating Temperature	-20 to 45 Deg C	Installation	Surface Mounted with Adhesive Tape
SDCM	<6	Dimming	Yes
IP Rating	IP20, IP65, IP67, IP68	Length	5 meters
Material	Copper PCB, PVC Coated	No. of LEDs	60 LEDs/m
PCB Color	White / Brown	CCT	3000K / 2700K / 4000K / 6000K
Net weight	0.03 kg/m	Warranty	3 years
Certifications	CE, RoHS, LM80, LM79		

Lumen Maintenance

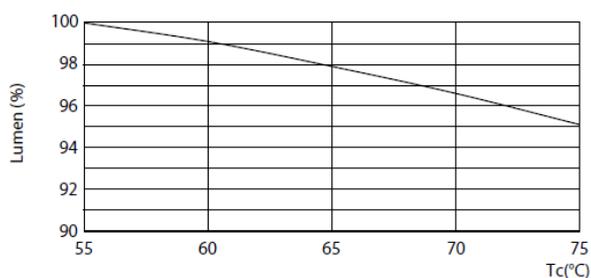

Life time

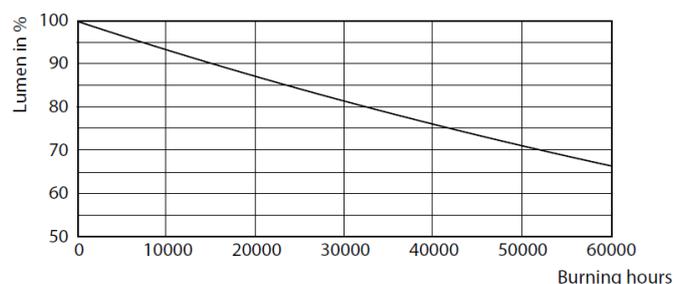

Product images




3000K

4000K

6000K



IP20

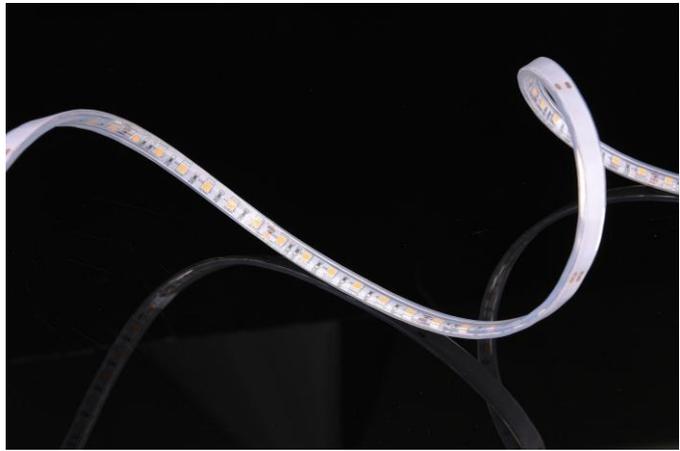

IP65



IP67



IP68

© 2019 UNIFCO WLL. All rights reserved. UNIFCO the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.