



AC Linea Flexi Strip light-5050

All linear lighting applications, are fruitfully fulfilled by these AC LED Strip lights. Power saving capability of up to 65%, along with high reliability makes LINEA the finest solution for Indirect lighting applications. Other applications also include product display showcases, contour lighting and architectural lighting.

Benefits

- Instant start up
- No Flickering
- No Humming
- No emission of IR and UV rays
- Environment friendly, does not contain mercury (RoHS)

Features

- Powered by external electronic power supply
- High class LED providing uniform light output

Applications


- Cove lighting in homes, offices
- Fashion Stores
- Malls

Specifications


| | |
|-----------------------|-------------------------------|
| Model No. | S5050-60-AC |
| Type | Linear Light |
| Light Source | SMD LED |
| Power | 14.4W/M |
| Power Factor | 0.9 |
| Luminous flux | 1440 LM/M |
| CCT | 3000K / 2700K / 4000K / 6000K |
| SDCM | <6 |
| IP Rating | IP65 |
| Material | Copper PCB, PVC Coated |
| Operating Temperature | -20 to 45 Deg C |
| Net weight | 0.14 kg/m |
| Length | 50 meters |

| | |
|----------------|------------------------------------|
| Input Voltage | 220-240VAC |
| Frequency | 50-60Hz |
| Driver | External (Integrated) |
| THD | <20% |
| Beam Angle | 120 Degree |
| Life Span | 25,000 Hrs |
| CRI | >83 |
| PCB Color | White / Brown |
| Dimming | Optional |
| No. of LEDs | 60 LEDs/m |
| Installation | Surface Mounted with Adhesive Tape |
| Warranty | 3 years |
| Certifications | CE, RoHS, LM80, LM79 |

Lumen maintenance

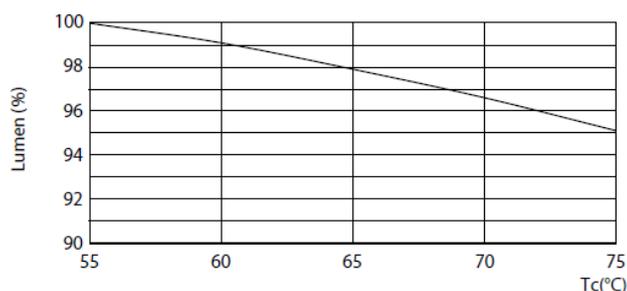

Life time

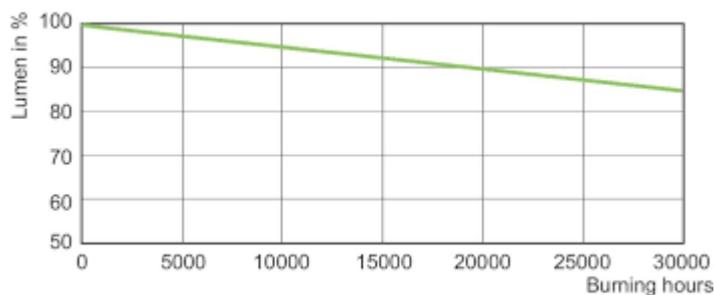


Product images



3000K

4000K

6000K

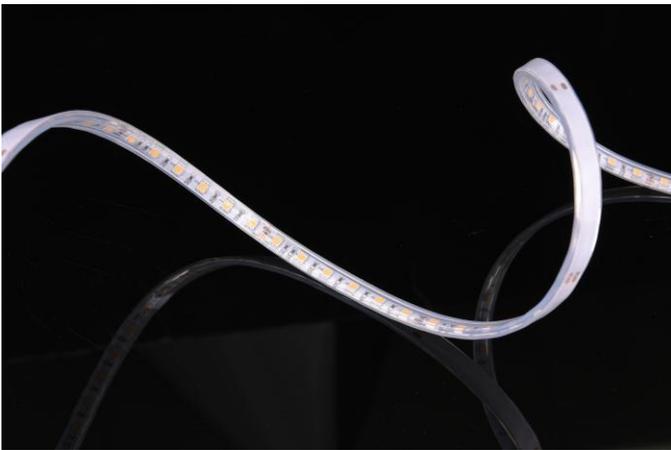

IP 65

© 2019 UNIFCO WLL. All rights reserved. UNIFCO the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.