



Retro LED PL lamp SL 6W G24q 360D

Features

- Energy efficient replacement for conventional CFL lamps.
- High efficiency LED light source, 360-degree beam angle for maximum illumination.
- Unique aluminium heatsink passive cooling system, uses an increased cooling surface area to reduce the operating temperature of LED and Driver.
- Suitable for totally enclosed fixtures.
- Driver components from FIRST MOS (USA), MPS IC CHIP (USA), Rubycon Capacitor (JAPAN).
- Built in surge protection.
- High light transmittance PC diffusers.
- Flicker free & Instant ON.
- RoHS Compliant.

Applications




- Wall lights, Down lights, Ceiling lights, bollards lights.

Specifications

Model No.	S02909-6-4P-360D
Type	PL (retrofit for CFL lamp)
Light Source	LG 2835 SMD LED
Power	6W
Base	G24q 4 Pin (GX24q compatible)
Power Factor	0.9
THD	<20%
Beam Angle	360 Degree
CCT	4000K (840)
SDCM	<6
IP Rating	IP20
Material	PC
Lamp finish	Milky white
Warranty	3 years

Input Voltage	85-277VAC
Frequency	50-60Hz
Driver	inbuilt
Luminous flux	882LM
Luminous efficacy	147LM/W
Life	35,000 Hrs (L70)
CRI	>83
Dimming	No
T Cas Max (Tc)	65 Deg C
Working Temperature	-25 to 45 Deg C
Dimension	D33mm X 94mm
Certifications	CE, RoHS, LM79
Net weight	0.17 Kg
Equivalent lamp power	6W LED =13W/18W CFL

Photometric data

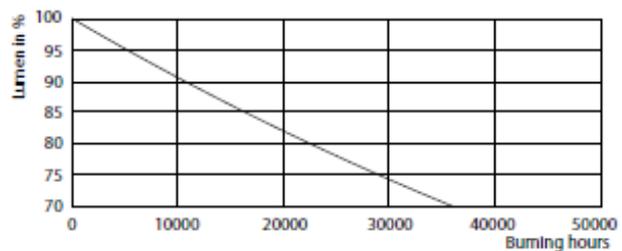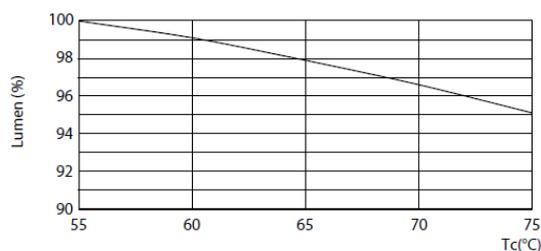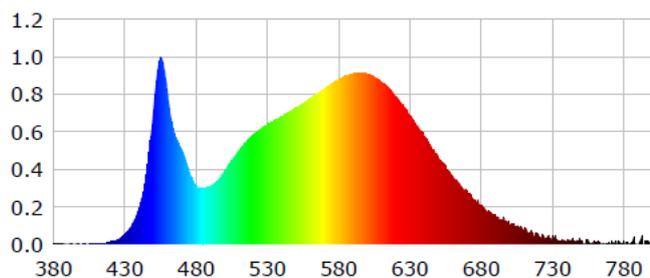

Dimension drawing

