



GX53-Retro LED lamp-6W

Features

- High efficiency LED light source, for replacing conventional FL lamps
- 120-degree beam angle for maximum illumination.
- Unique heat sink passive cooling system, uses an increased cooling surface area to reduce the operating temperature of LED and Driver.
- Suitable for totally enclosed fixtures.
- Driver components from FIRST MOS (USA), MPS IC CHIP (USA), Rubicon Capacitor (JAPAN),
- Built in surge protection.
- High light transmittance,
- Flicker free and instant ON.

Applications

Indoor and outdoor applications to replace the halogen, fluorescent lamps in


- Wall lights, Bollards
- Spot lights, Downlights, Cabinets lights etc

Specifications

Model No.	S05333-GX53-6
Type	Downlight lamp
Light Source	LG 2835 SMD LED
Power	6W
Luminous flux	600LM
Luminous efficacy	100LM/W
Lifespan	30,000 Hrs (L70)
Beam Angle	120 Degree
CCT	3000K / 4000K / 6000K
SDCM	<6
IP Rating	IP44
Material	Aluminium + PC
Lamp cover	Frosted milky white
Warranty	3 years

Input Voltage	100-265V AC
Frequency	50-60Hz
Driver	Inbuilt
Power Factor	0.9
THD	<20%
Base	GX53
CRI	>80
Dimming	No
T Cas Max (Tc)	70 Deg C
Working Temperature	-25 to 45 Deg C
Dimension	D75*H27 mm
Certifications	CE, RoHS
Net weight	150gm
Equivalent lamp power	6W LED =15W CFL

Dimensions

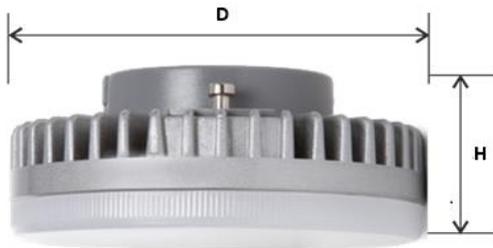


D-70mm, H-26mm

Product images



Lumen maintenance

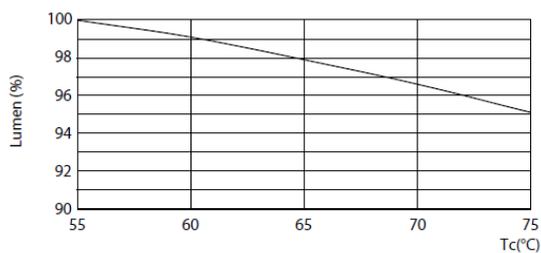

Life time

